



## Dali-Scope

### Category

B) Handheld Test & Control

### Description

A hand-held tool for testing, programming and configuring DALI (Digital Addressable Lighting Interface) devices



### Mechanical

- Housing: Hand-Held Case
- Material: ABS 94HB Plastic - UL94MB Fire Rated
- Overall Dimensions: 95mm (H) x 65mm (W) x 28mm (D)
- Mass: 0.1kg
- Country of Manufacture: United Kingdom

### Electrical

- Input Voltage: 2 x AA Battery
- Duty Cycle: 80% @ 25°C

### Environmental

- Operating Temperature: 0°C to 40°C
- Storage Temperature: -10°C to +50°C
- Operating Relative Humidity (max): 80% Non-Condensing
- IP Rating: IP20 Indoor Use Only
- Certification: CE FCC, WEEE, RoHS
- Warranty: 2 Year (Return to Base)

### User Interface / Indication

- Connections:
  - (1) RCA Jack (phono) DALI Connection
  - (1) AA Battery Compartment
- User Interface: 9 Button Control Panel
- Configuration: Setup Menu Option
- Indication: Dot Matrix Display

### Control

- Control: Control over 1 DALI circuit
- Output Protocols: DALI (Digital Addressable Lighting Interface)
- Output Connector: RCA (phono) jack
- Configuration:
  - Power Off Timer
  - Brightness, Scroll Speed
  - Manual Unit Test

### Isolation / Protection

- Isolation: Opto-Isolation on DALI lines

### Package Contents

- Dali-Scope
- User Guide
- Phono to Clip Lead
- (2) AA Batteries

### Ordering Info


Product Code: Dali-Scope

Accessories (not included):


- Replacement Batteries (10 pack)
- Replacement Dali-Scope Lead
- AL Soft Case



Mounting Drawing

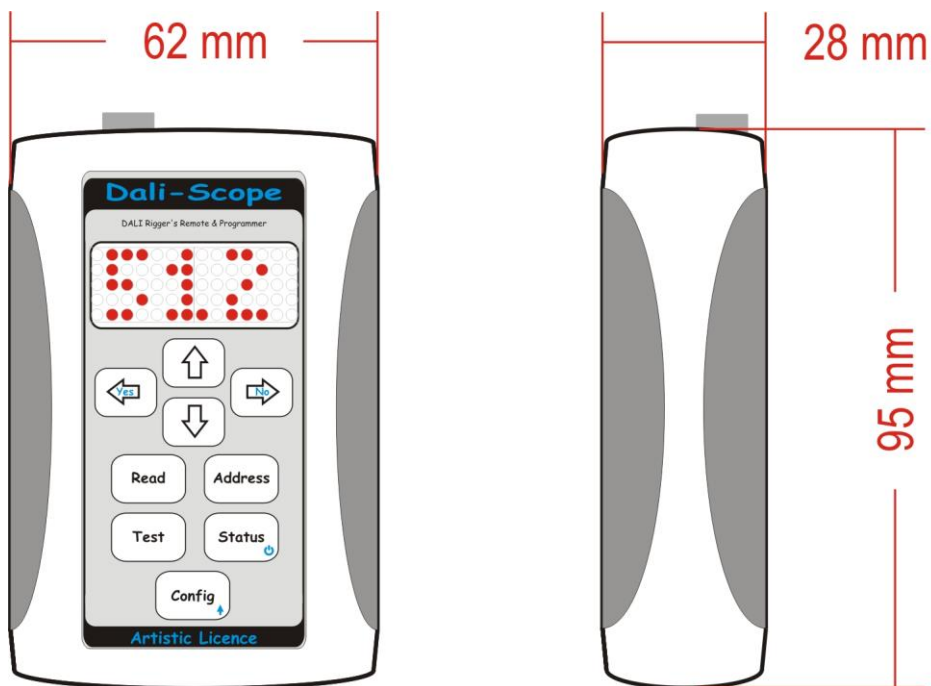

Wiring Drawing

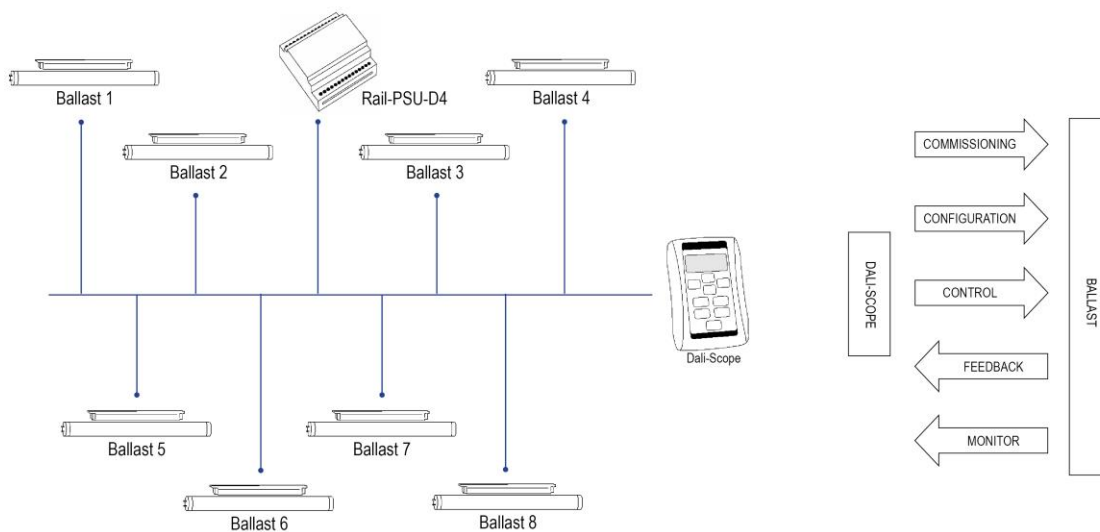

[www.ArtisticLicence.com](http://www.ArtisticLicence.com)

Artistic Licence, The Mould Making Workshop  
Soby Mews, Bovey Tracey, TQ13 9JG, UK

Sales@ArtisticLicence.com  
Support@ArtisticLicence.com  
Tel: +44 (0) 20 8863 4515

*Due to our policy of continuing product improvement specifications are subject to change without notice*

