



versaSplit iso extreme xlr8-8

Category

A) DMX Splitters & Wireless DMX

Description

10-output DMX512 splitter / fixer with all XLR8 connectors and isolated outputs with enhanced electrical protection and surge protection.



Mechanical

- Housing: 19" 1U Rack Enclosure
- Material: Metal
- Overall Dimensions: 1RU (H) x 19" Rack (W) x 227mm (D)
- Mass: 2.28kg
- Mounting: 19" Rack Mount with rack ears supplied
- Country of Manufacture: United Kingdom

Power & Electrical

- Input Voltage: 90 - 250 VAC
- Input Connector: IEC
- Input Power (max): 250W
- Duty Cycle: 80% @ 25°C
- Mains Fuse: 3.15A Slow Blow

Environmental

- Operating Temperature: 0°C to 40°C
- Storage Temperature: -10°C to +50°C
- Operating Relative Humidity (max): 80% Non-Condensing
- IP Rating: IP20 Indoor Use Only
- Certification: CE FCC, WEEE, RoHS
- Warranty: 2 Year (Return to Base)

Configuration / Indication

- Input module: Split/Fix switch
- Input module: LED indication for power, isolation, DMX/RDM activity, collision/fix

Control / Data Connections

- Input Protocols: DMX512, DMX512(1990), DMX512-A, RDM
- Input Connectors: (1) 8-pin XLR, (1) 8-pin XLR loop-through
- Output Protocols: Same as input
- Output Connector: (10) 8-pin XLR

DMX512 Ports

- Input mode: optically isolated
- Input ESD protection: 12kV
- Input voltage protection: +/- 80V
- Output mode: isolated
- Output ESD protection: +15kV
- Electrocution protection: All outputs protected against continuous connection to 425 VAC (self-healing)
- Output conditioning: slew-rate limited

Package Contents


- versaSplit iso extreme xlr8-8
- IEC mains lead

Ordering Info


Product Code: vSplit iso extreme xlr8-8



Mounting Drawing

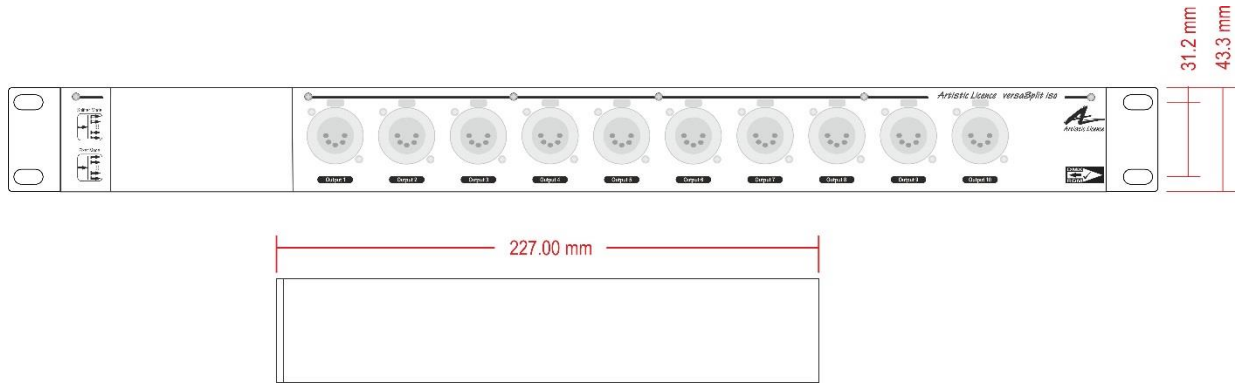

Application Drawing

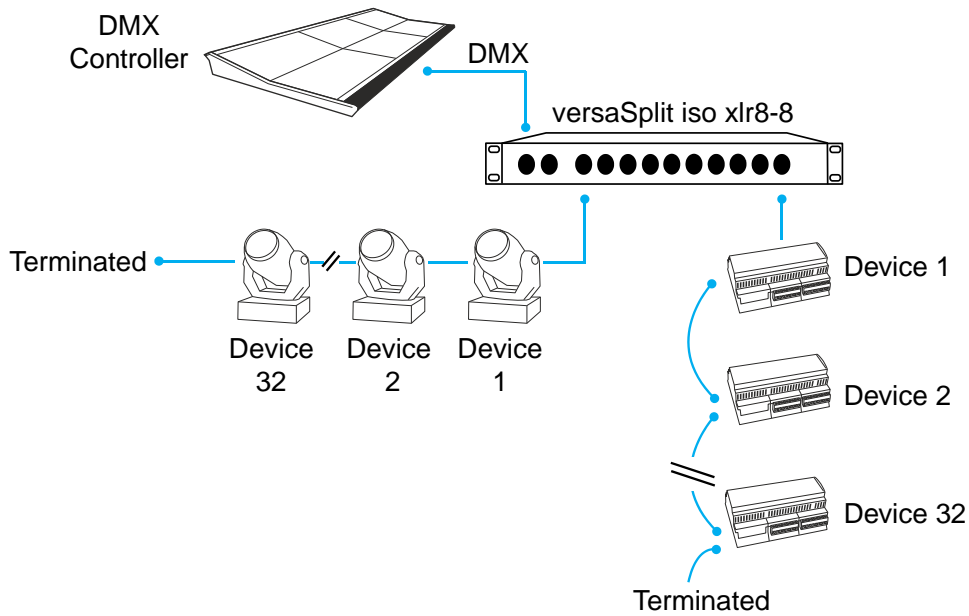

In this example, the maximum number of DMX devices are driven on outputs 1 and 10.



www.ArtisticLicence.com

Artistic Licence, The Mould Making Workshop
Soby Mews, Bovey Tracey, TQ13 9JG, UK

Sales@ArtisticLicence.com
Support@ArtisticLicence.com
Tel: +44 (0) 20 8863 4515

Due to our policy of continuing product improvement specifications are subject to change without notice

