



versaSplit mini x-5

Category

A) DMX Splitters & Wireless DMX

Description

6-output DMX512 splitter / fixer with XLR5 connectors



Mechanical

- Material: Metal
- Overall Dimensions: 120mm (H) x 185mm (W) x 50mm (D)
- Mass: 800g
- Mounting: Desktop or truss (adapter not included)
- Country of Manufacture: United Kingdom

Power & Electrical

- Input Voltage: 85 - 264 VAC
- Input Connector: IEC
- Input Power (max): 50W
- Duty Cycle: 100% @ 25°C
- Mains Fuse: 1A Slow Blow

Environmental

- Operating Temperature: 0°C to 40°C
- Storage Temperature: -10°C to +50°C
- Operating Relative Humidity (max): 80% Non-Condensing
- IP Rating: IP20 Indoor Use Only
- Certification: CE, WEEE, RoHS
- Warranty: 2 Year (Return to Base)

Configuration / Indication

- Input module dependent

Control / Data Connections

- Input Protocols: Dependent on module fitted
- Input Connectors: Dependent on module fitted
- Output Protocols: DMX512, DMX512(1990), DMX512-A
- Output Connector: (6) 5-pin female XLR

DMX512 Outputs

- Output mode: ground referenced
- Output ESD protection: 12kV
- Output voltage protection: +/- 80V
- Output conditioning: slew-rate limited

Package Contents


- versaSplit mini (no input module fitted)
- User guide
- IEC mains lead

Ordering Info


Product Code: vSplit mini x-5



Mounting Drawing

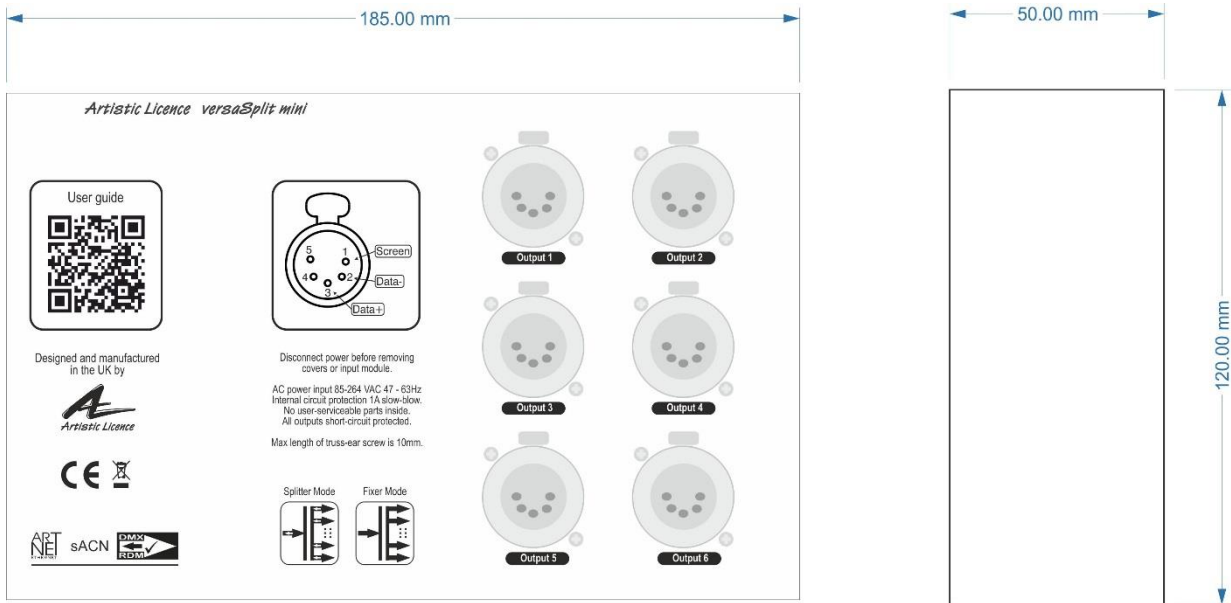

Application Drawing

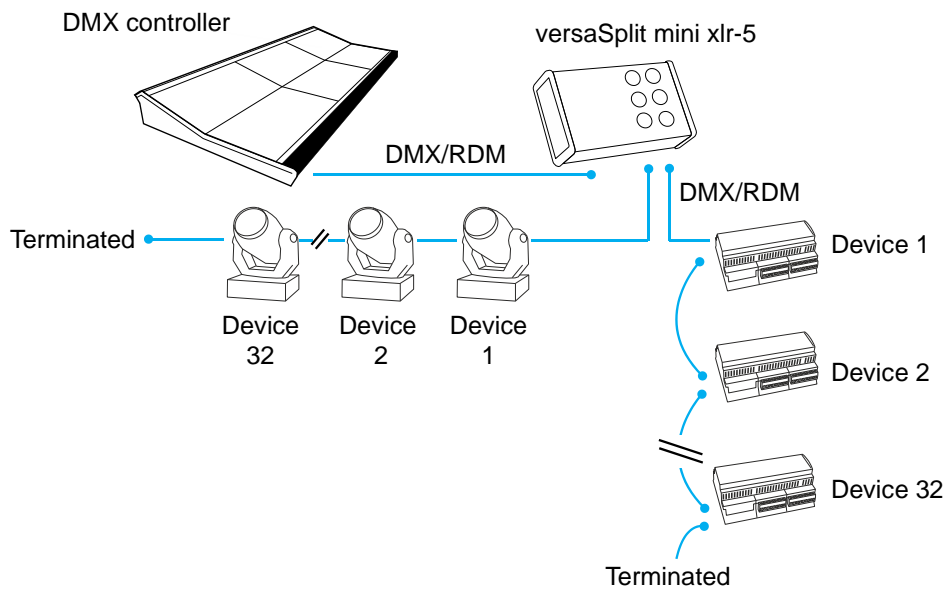

In this example, the maximum number of DMX devices are driven on two of the outputs.



www.ArtisticLicence.com

Artistic Licence, The Mould Making Workshop
Soby Mews, Bovey Tracey, TQ13 9JG, UK

Sales@ArtisticLicence.com
Support@ArtisticLicence.com
Tel: +44 (0) 20 8863 4515

Due to our policy of continuing product improvement specifications are subject to change without notice

