



versaSplit mini xlr5-5

Category

A) DMX Splitters & Wireless DMX

Description

6-output DMX512 splitter / fixer with XLR5 connectors



Mechanical

- Material: Metal
- Overall Dimensions: 120mm (H) x 185mm (W) x 50mm (D)
- Mass: 800g
- Mounting: Desktop or truss (adapter not included)
- Country of Manufacture: United Kingdom

Power & Electrical

- Input Voltage: 85 - 264 VAC
- Input Connector: IEC
- Input Power (max): 50W
- Duty Cycle: 100% @ 25°C
- Mains Fuse: 1A Slow Blow

Environmental

- Operating Temperature: 0°C to 40°C
- Storage Temperature: -10°C to +50°C
- Operating Relative Humidity (max): 80% Non-Condensing
- IP Rating: IP20 Indoor Use Only
- Certification: CE, WEEE, RoHS
- Warranty: 2 Year (Return to Base)

Configuration / Indication

- Input module: Split/Fix switch
- Input module: LED indication for power, isolation, DMX/RDM activity, collision/fix

Control / Data Connections

- Input Protocols: DMX512, DMX512(1990), DMX512-A, RDM
- Input Connectors: (1) 5-pin male XLR, (1) 5-pin female XLR loop-through
- Output Protocols: Same as input
- Output Connector: (6) 5-pin female XLR

DMX512 Ports

- Input mode: optically isolated
- Input ESD protection: 12kV
- Input voltage protection: +/- 80V
- Output mode: ground referenced
- Output ESD protection: 12kV
- Output voltage protection: +/- 80V
- Output conditioning: slew-rate limited

Package Contents


- versaSplit mini
- (1) XLR5 DMX512/RDM input module
- User guide
- IEC mains lead

Ordering Info


Product Code: vSplit mini xlr5-5



Mounting Drawing

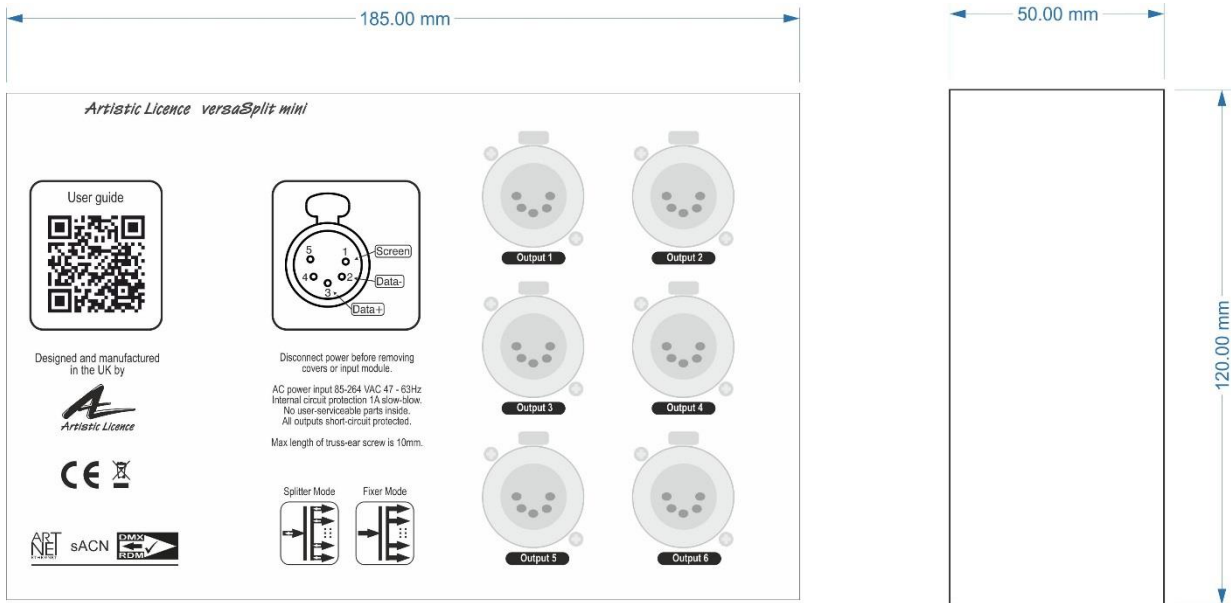

Application Drawing

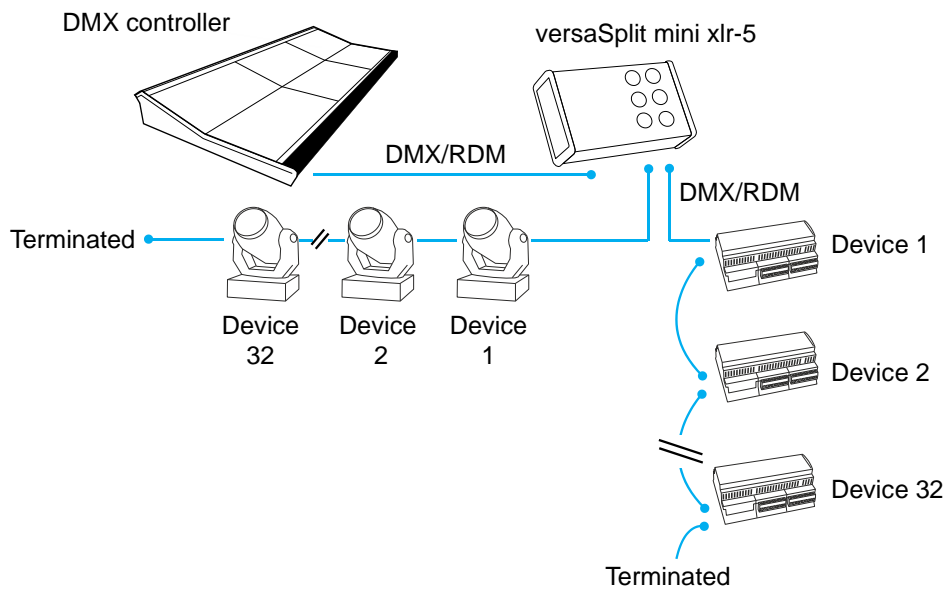

In this example, the maximum number of DMX devices are driven on two of the outputs.



www.ArtisticLicence.com

Artistic Licence, The Mould Making Workshop
Soby Mews, Bovey Tracey, TQ13 9JG, UK

Sales@ArtisticLicence.com
Support@ArtisticLicence.com
Tel: +44 (0) 20 8863 4515

Due to our policy of continuing product improvement specifications are subject to change without notice

