



versaSplit mono crmx-5

Category

A) DMX Splitters & Wireless DMX

Description

10-output DMX512 splitter / fixer with CRMX wireless DMX input and XLR5 outputs



Mechanical

- Housing: 19" 1U Rack Enclosure
- Material: Metal
- Overall Dimensions: 1RU (H) x 19" Rack (W) x 227mm (D)
- Mass: 2.28kg
- Mounting: 19" Rack Mount with rack ears supplied
- Country of Manufacture: United Kingdom

Power & Electrical

- Input Voltage: 90 - 250 VAC
- Input Connector: IEC
- Input Power (max): 250W
- Duty Cycle: 80% @ 25°C
- Mains Fuse: 3.15A Slow Blow

Environmental

- Operating Temperature: 0°C to 40°C
- Storage Temperature: -10°C to +50°C
- Operating Relative Humidity (max): 80% Non-Condensing
- IP Rating: IP20 Indoor Use Only
- Certification: CE FCC, WEEE, RoHS
- Warranty: 2 Year (Return to Base)

Configuration / Indication

- Input module: Split/Fix switch; Link push-button for CRMX wireless DMX configuration; LED indication for power, signal strength and CRMX wireless DMX status / data activity

Control / Data Connections

- Input Protocols: CRMX wireless DMX
- Input Connector: Radio antenna
- Output Protocols: DMX512, DMX512(1990), DMX512-A
- Output Connector: (10) 5-pin female XLR

DMX512 Outputs

- Output mode: ground referenced
- Output ESD protection: 12kV
- Output voltage protection: +/- 80V
- Output conditioning: slew-rate limited

Package Contents


- versaSplit mono
- (1) CRMX wireless DMX input module
- User guide
- IEC mains lead
- Rack ears

Ordering Info


Product Code: vSplit mono crmx-5



Mounting Drawing

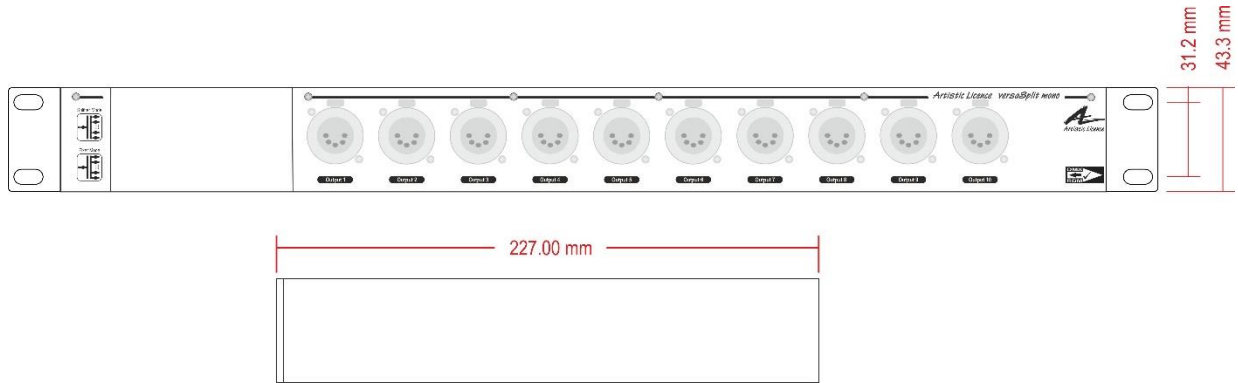

Application Drawing

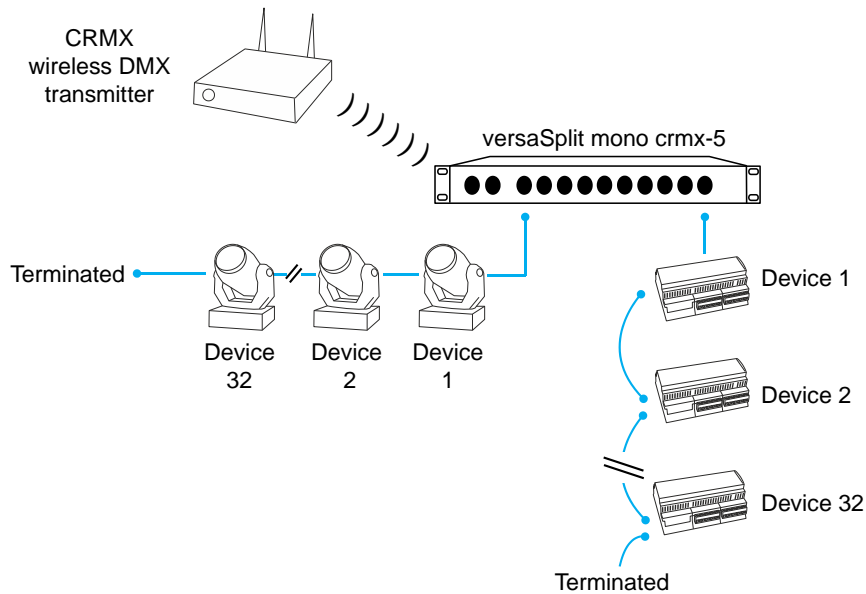

In this example, the maximum number of DMX devices are driven on outputs 1 and 10.



www.ArtisticLicence.com

Artistic Licence, The Mould Making Workshop
Soby Mews, Bovey Tracey, TQ13 9JG, UK

Sales@ArtisticLicence.com
Support@ArtisticLicence.com
Tel: +44 (0) 20 8863 4515

Due to our policy of continuing product improvement specifications are subject to change without notice



Artistic Licence

versaSplit mono crmx-5