



Two-Play XT

Category

D) Lighting Controllers

Description

A Two Universe Art-Net & DMX Recorder and Playback Controller



Mechanical

- Housing: DIN Rail Case
- Material: Polycarbonate Plastic - UL94-V0 rated
- Overall Dimensions: 160mm (W) x 110mm (H) x 62mm (D)
- Mass: 0.34kg
- Mounting: DIN Rail (35mm) or Surface Mount
- Country of Manufacturer: The United Kingdom

Electrical

- Input Voltage: 9-48V DC or PoE
- Input Connector: RJ45 (PoE) / 2pin Screw Term Push Connector
- Input Power (max): 12W
- Duty Cycle: 80% at 25°C

Environmental

- Operating Temperature: 0°C to 40°C
- Storage Temperature: -10°C to +50°C
- Operating Relative Humidity (max): 80% Non-Condensing
- IP Rating: IP20 Indoor Use Only
- Certification: CE, FCC, WEEE, RoHS
- Warranty: 2 Year (Return to Base)

User Interface / Indication

- Connections: (1) RJ45 Art-Net
- (1) 2pin Screw / Push DC Voltage Input
- (2) 3pin Screw / Push DMX Input
- (2) 3pin Screw / Push DMX Output
- (4) 4pin Screw / Push Opto Triggers
- User Interface: Web-Browser / DMX-Workshop
- Indication: Power / Art-Net Activity / DMX Input & Output
- Memory Type: SD Card (min 2GB)

Control

- Control: 2 Universe show playback & record
- Input Protocols: Art-Net II, DMX512-A
- Input Connector: RJ45 - Art-Net
- Push Screw Terminal (2.5mm² max wire) - DMX
- Output Protocols: Art-Net II, DMX512-A
- Output Connector: RJ45 - Art-Net
- Push Screw Terminal (2.5mm² max wire) - DMX
- Sensors: (4) Volt Free Contacts
- Configuration: Universe, Sub-Net, Config (Art-Net)
- Ethernet IP Address, Show File Control
- Macros (time, contacts, external)
- Memory: 18 hours (min) record time (File length 3 hours-max)

Isolation / Protection

- Isolation: Ethernet & Power Input - Isolated to 1kV
- DMX - Ground Referenced
- Protection: Reverse DC Voltage Protected
- Internal Resettable Fuse (Control / External Contacts)
- +15kV ESD DMX Driver Protection

Package Contents

- Two-Play XT + User Guide
- Jumpers (for configuration pins)
- (1) 2pin Screw Terminal Push Connector (input power)
- (4) 4pin Screw Terminal Push Connector (opto-trigger)
- (2) 3pin Screw Terminal Push Connector (DMX input)
- (2) 3pin Screw Terminal Push Connector (DMX output)

Ordering Info

Product Code: Two-Play XT
(Requires external PSU)

Accessories (not included):


Art-Switch PoE4

PSU-9-1.5-DR2






Mounting Drawing

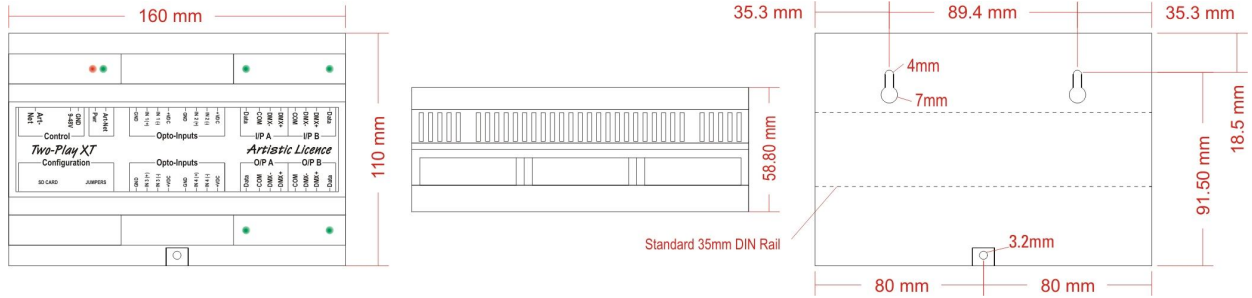

Wiring Drawing

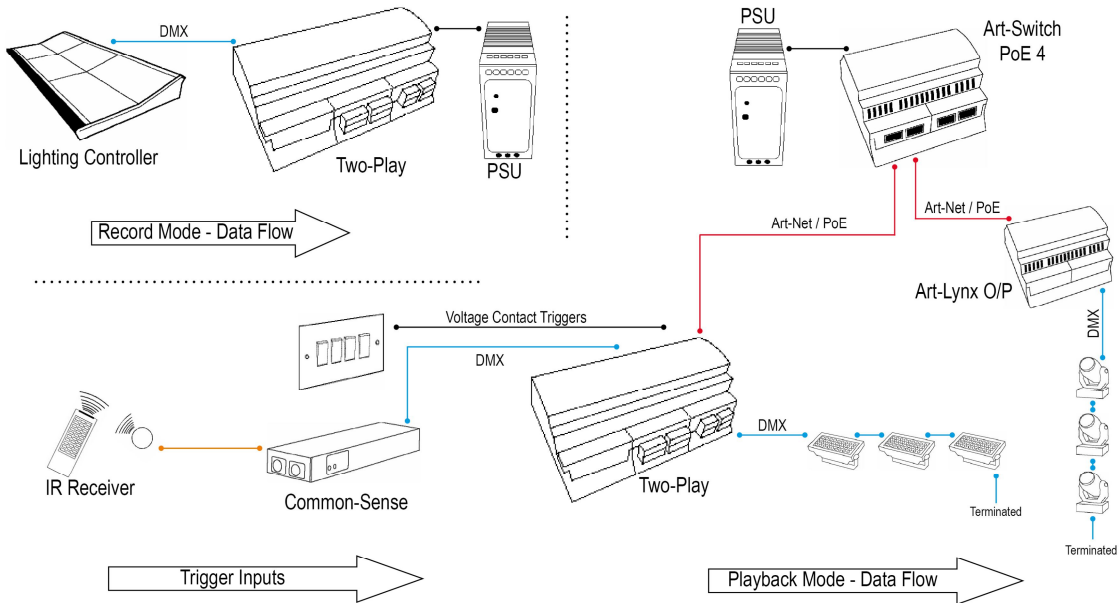

Artistic Licence Engineering Ltd

Artistic Licence Integration Ltd

24 Forward Drive
Christchurch Avenue
Harrow, Middlesex
London, HA3 8NT
United Kingdom

Telephone +44 (0)20 8863 4515
Fax +44 (0)20 8426 0551


Email: Sales@ArtisticLicence.com
www.ArtisticLicence.com

Artistic Licence Asia

1203, 69 Jervois Street
Shueng Wan
Hong Kong

Telephone +852 2850 8808
Fax +852 2850 8825

Email: ALASales@ArtisticLicence.com
www.ArtisticLicence.com

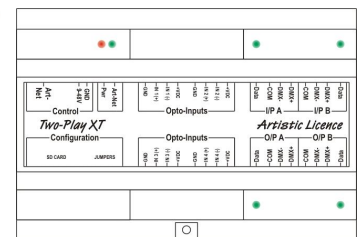

Due to our policy of continuing product improvement specifications are subject to change without notice

